




## Boom Interconnect Box

The Boom Interconnect Box provides water tight, secure and safe electrical connections from the Electrofisher output to the Anode and Cathode system of the boat (Booms, boat hull, Isolated cathode Etc.)

The output cables, which are supplied with your Electrofisher, are simply inserted through watertight strain relief connectors and connected to the Anode or Cathode insulated terminal post. Cables from your booms are inserted through additional strain relief connectors and connected to the desired terminal. All connections are made using 1/4" ring lugs on the terminal posts and booms may be reconfigured as anodes or cathodes simply by changing the terminal to which the boom is connected.

A 3 foot cable with 1/4" ring lugs on each end is provided to connect the boat hull as the cathode if desired.

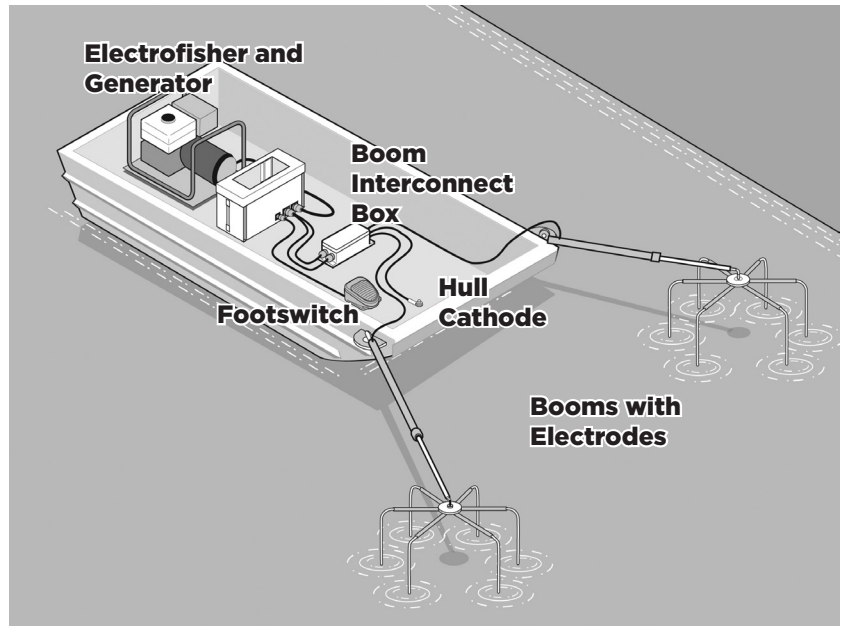

PARTS LIST:	QTY.	PART #
Plastic Junction Box	1	5680
Strain-Relief, Liq.-Tight .50	5	1522
Battery Power Post	2	5633
Screw 1/4-20 X 1" Flat H. Sl. Nylon	4	5868
1/4-20 S.S. Nuts	4	812
Lug #8 Cable 1/4" hole	2	1257
Dowell, 3/8 dia. PVC, dark grey	1	5869
36" Cable Type W 8-1	1	5289
Plastic Rod 3/8"Dia. Watertight	1	9537
Washer, 1/4" Internal Star	4	0658
Tube, Heat Shrink, 3/8" Black	4"	1128
Screw 8-32 X 1/2" Truss Phil SS	4	3698
Cable #8, Diesel Locomotive 2KV	3'	5194
Screw 1/4 X 1 1/2" Flat Slot NY	1	5867
Label, Interconnect Box	1	6623

