





**SMITH ROOT**

# GPP DIGITAL COUNTER REPLACEMENT INSTRUCTIONS

1. Install new counter (part # 02093) in control panel and pull wiring (1 & 2) through black grommited wire access up towards the top of the main circuit board.
2. Access main circuit board to access connector and terminal strip (on boat models, a fiberglass cover must removed to expose circuit board).

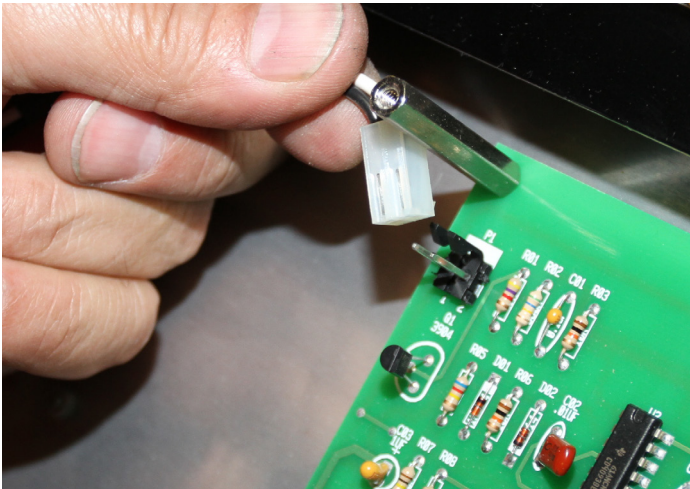

3. Connect black and white wire connector (1) to main board via connector on upper left corner of the board, designated P1, 1 & 2.

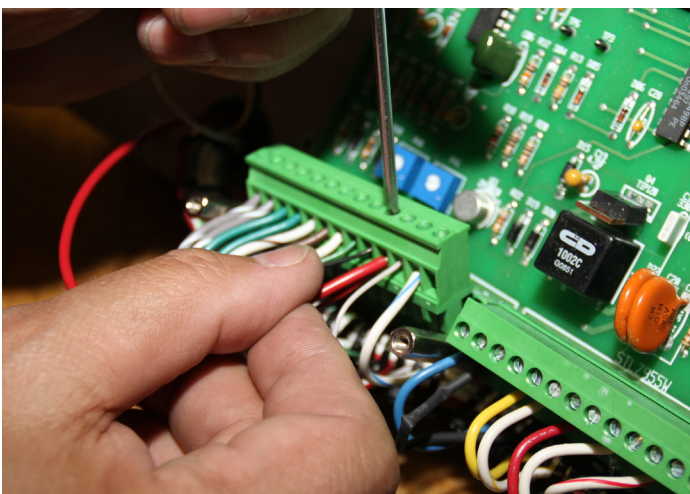

4. Connect red wire (2) to terminal strip, pin 10, via screw terminal. Ensure that connection is tight.
5. Replace fiberglass cover.


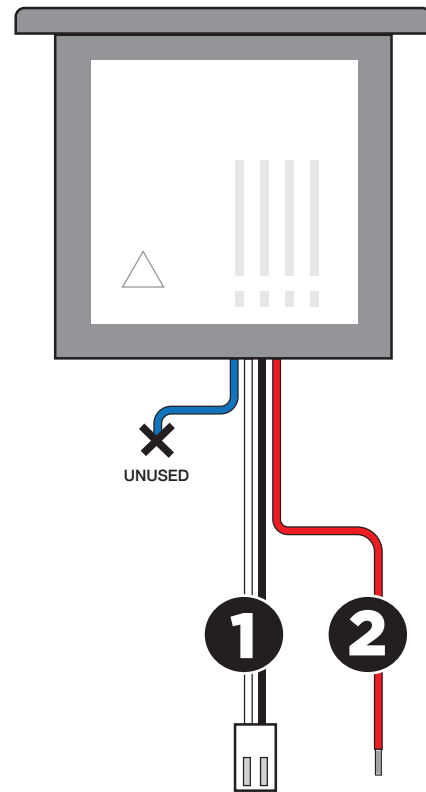


Diagram showing wiring configuration as supplied by Smith-Root.

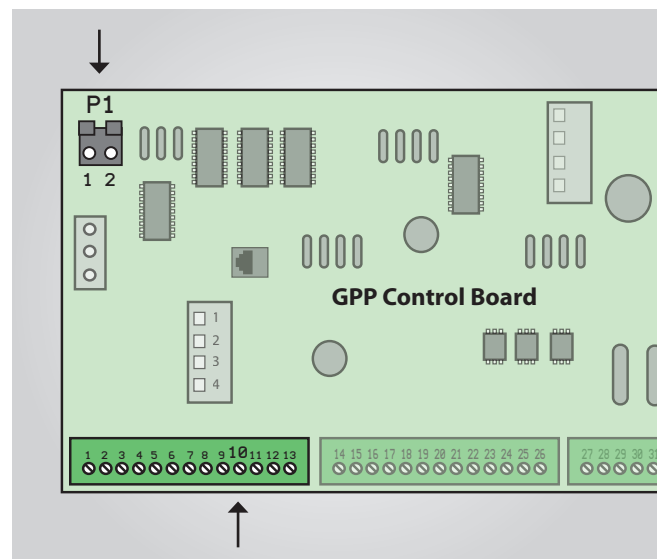

Location of 2 pin connector on upper left hand corner of board and location of terminal 10 on terminal strip.